


# Leakstopper

# TT-71 VAC

Powerful Leakstopper-Unit for leaking cooling water circuits

Operational use: with cooling water from 5°C up to 40°C

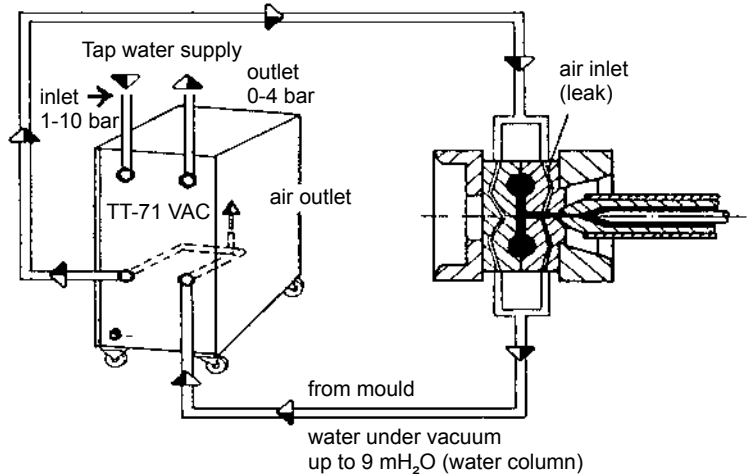

## Operational use

Can be used on leaking tools (cracks, defective seals, leaking cooling bores) which are cooled by tap water or closed water circuits.

The high vacuum output of the pump prevents water seeping out of the leaks. The air that is sucked in via the leak is separated automatically in the unit.

The TT-71 VAC does not incorporate a heater. This model is not a temperature control unit. The unit is serially connected into the cooling water system to the mould.

## Features included

- Pressure/Vacuum gauge mounted on TO and FROM mould.
- Motor protection switch with indication lamp (failure).
- Corrosion resistant unit (longevity).
- Automatic level control for dry run protection.
- Automatic air elimination.
- Unit on castors.

## Technical data

**Temperature range** + 5°C up to + 40°C (cooling water)

### Pump capacity

*Pressure mode* max. 5 bar / 110 l/min  
*Vacuum mode* vacuum max. 9 mH<sub>2</sub>O

### Connections

*To / from mould* ¾" BS female thread, each one double outlet connection ½", two shut-off valves ½" and two hose nipple ø13mm  
*Cooling water in/out* ¾" BS female thread

**Dimensions (LxWxH)** 700 x 305 x 765 mm

**Weight** 50 kg

**Colour** Silvergrey RAL 7001

**TOOL-TEMP**<sup>®</sup>